

Sound Guard SST

Strong, silent, timesaving, & made of the finest materials, the Westerbeke Sound Guard SST is designed for rugged service and is easy to install.

Engineered for silent operation

The Sound Guard SST enhances your offshore boating experience. Keeping your generator set to a whisper, it allows you to enjoy the pleasure of boat ownership in the quiet of your favorite cove. Experience engineering excellence and a new standard of quality that is unheard of. Available for 5.0–33.0kW diesel models, the Sound Guard SST further reduces the average sound intensity of a generator set up to 50% so you can forget you have one operating.

Serviceability is a snap

To remove any side or end panel requires only a quick snap of 2 latches and you have full access to all four sides. Westerbeke Sound Guards have always been famous for ease of serviceability and now have managed to create an even higher standard. Two access doors are also provided on the service side panel.

Pre-connected for ease of installation

The top panel can be removed in seconds for access to lifting eyes. The base and frame contain bulkhead fittings for all the generator's external connections including the raw water line, siphon break, fuel lines, exhaust line, AC wiring and battery cables. Westerbeke supplies the necessary hoses, cables and hardware to make these connections, allowing quick and easy "plug & play" installations. Only a flat-head screwdriver is required to assemble the frame - the panels require no assembly. Or you can order your new Westerbeke diesel pre-installed in the Sound Guard SST.



Materials are of the highest quality



The Sound Guard SST consists of 5 powder coated aluminum panels and stainless steel base and frame. The powder coated aluminum panels provide optimum corrosion resistance while reducing the weight of the enclosure. The frame (where attached to the base) and base are likely to be subjected to the most moisture; therefore, are of stainless steel, a highly corrosion resistant metal. Even the rivets and fasteners are of stainless steel. The top panel also covers the side panels to lessen the likelihood that moisture will enter the Sound Guard SST.

Strong, sturdy and rugged

The Sound Guard SST is designed for tough duty. While not recommended to kneel or stand on the unit, some may ignore warnings and do just that. The thick frame and sturdy panels result in a very robust enclosure.

Stylish appearance

The Sound Guard SST is designed to please the eye and resist the corrosion process that age many sound enclosures before their time. Westerbeke believes each customer should be proud of any product's appearance well after the initial purchase.

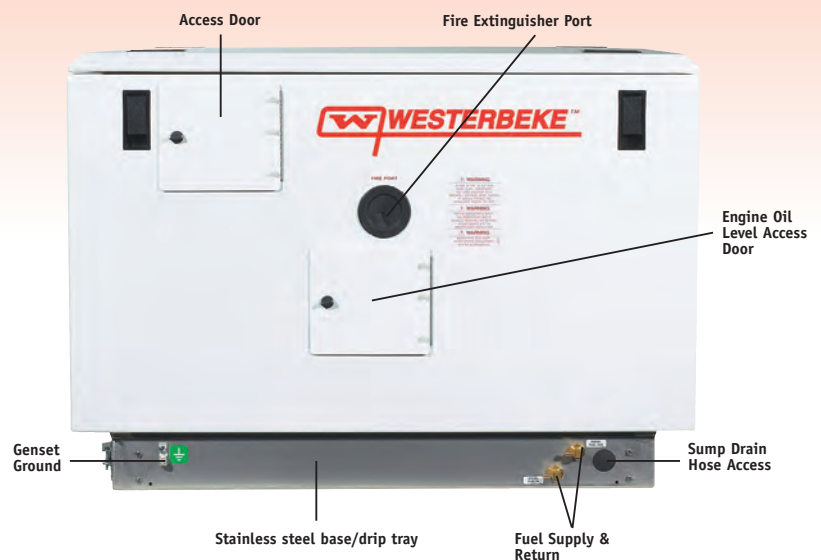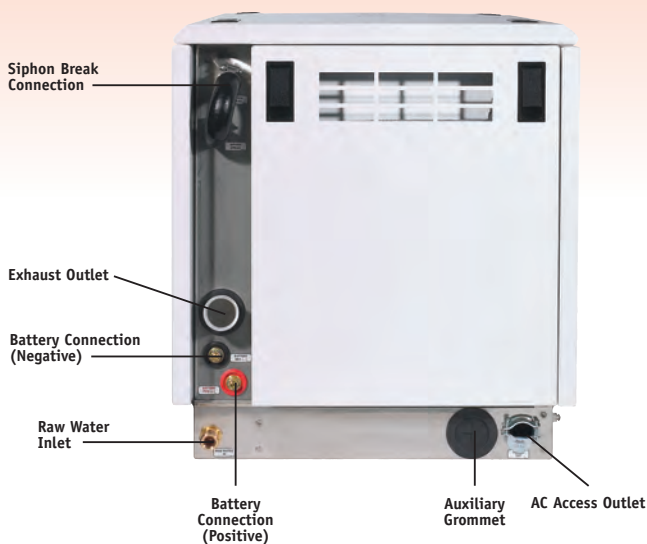

Location of some features may vary model to model.



Models (60/50Hz)	SST Part #	Dimensions (L x W x H)	Weight
5.5/5.0 BCD 7.6/5.7 BTD	49484	33.3 x 21.1 x 22.3 in. 846 x 536 x 566 mm.	71 lbs. 33 kilos
5.5/5.0 EDC 7.6/5.7 EDT	52709		78 lbs. 36 kilos
8.0/6.0 BTDA 10.0/7.5 BTD 11.5/9.2 BTD	49483	36.1 x 23.2 x 25.3 in. 917 x 589 x 643 mm.	83 lbs. 37 kilos
8.0/6.0 EDT 10.0/7.5 EDT 11.5/9.2 EDT	53462		90 lbs. 41 kilos
12.5/9.4 BTDB 15.0/12.0 BTDC	49527		87 lbs. 40 kilos
12.5/9.4 EDT 15.0/12.0 EDT	53463	1003 x 589 x 643 mm.	94 lbs. 43 kilos
17.0/13.5 EDE*	54414	45.0 x 26.0 x 27.0 in. 1143 x 660 x 686 mm.	120 lbs. 54 kilos
22.0/17.0 EDE*	54442	45.0 x 26.0 x 27.0 in. 1143 x 660 x 686 mm.	120 lbs. 54 kilos
25.5/21.0 EDE 28.5/23.5 EDE 33.0/26.0 EDE	53070	50.7 x 27.2 x 30.8 in. 1288 x 691 x 782 mm.	150 lbs. 68 kilos

*Use PN 53070 for optional 3-phase units only.

